


78211533HI

Hybrid Combiner 3-in/3-out
 PIM -160dBc
 698-4000Mhz

3:3 Hybrid Combiner 698-4000Mhz

Type	78211533HI
Frequency (MHz)	698-4000
Distribution Loss (dB)	≤ 5.1
Isolation (dB)	≥ 25
PIM3 (dBc, @2x43dBm)	≤ -160
VSWR	≤ 1.30
Input Impedance (Ω)	50
Max. Input Power (W)	500
Peak Power (W)	1,500
AI5G/DC Bypass (2500mA max)	IN1 ↔ OUT3 IN2 ↔ OUT2 IN3 ↔ OUT1
Connector	4.3-10F
Dimension (mm, excluding bracket and connectors)	241 x 102 x 40
Operating Temperature (°C)	-40 to +80
Operational Humidity (%)	≤ 95
Ingress Protection	IP65
Mounting	Wall Mount

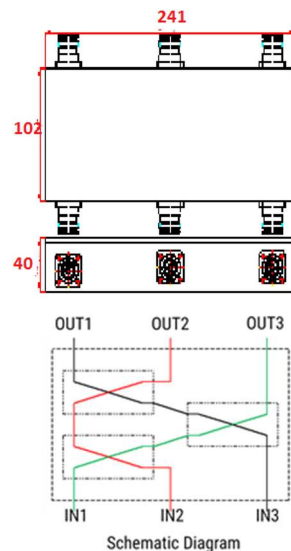

* excluding mounting bracket and connectors