

## 7871xx15

### Attenuator 5W 4.3-10 DC-4000

### Attenuator DC-4000 5W


Type	78710315	78710615	78711015	78711515
Attenuation (dB)	3	6	10	15
Attenuation Tolerance (dB)	±0.7	±0.7	±0.7	±0.7

Type	78712015	78713015	78714015
Attenuation (dB)	20	30	40
Attenuation Tolerance (dB)	±0.7	±0.7	±0.7

Electrical Specifications	
Frequency (MHz)	DC - 4000
PIM3 (dBc, @2x33dBm)	≤ -120
Impedance (Ω)	50
Return Loss (dB)	≥ 21
Max Input Power (W)	5
Connector	4.3-10 F/M

Mechanical and Environmental Specifications	
Dimension (mm)**	Ø30 x 35
Weight (kgs)*	0.22
Ingress Protection	IP55
Operating Temperature (°C)	-55 to +125
Operating RH (%)	≤ 95

Packing Information	
Packing Size (mm)	70 x 30 x 30
SKU (unit/inner carton)	100 pieces per inner carton/box

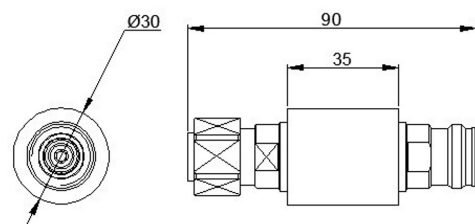

\* including mounting bracket and connectors  
 \*\* excluding mounting bracket and connectors