

7871xx45

Attenuator DC-4000 50W

Attenuator 50W 4.3-10
DC-4000

Type	78710345	78710645	78711045	78711545
Attenuation (dB)	3	6	10	15
Attenuation Tolerance (dB)	±0.7	±0.7	±0.7	±0.7

Type	78712545	78713045	78714045
Attenuation (dB)	20	30	40
Attenuation Tolerance (dB)	±0.7	±0.8	±0.8

Electrical Specifications

Frequency (MHz)	DC - 4000
PIM3 (dBc, @2x43dBm)	≤ -105
Impedance (Ω)	50
Return Loss (dB)	≥ 21
Max Input Power (W)	50
Connector	4.3-10 F/M

Signal process

Bidirectional device


Signal can be attenuated in both directions

Packing Information

Packing Size (mm)	160 x 70 x 70
SKU (unit/inner carton)	50 pieces per inner carton/box

Mechanical and Environmental Specifications

Dimension (mm)**	Ø60 x 85
Weight (kgs)*	4.3-10 F/M: 0.45
Ingress Protection	IP55
Operating Temperature (°C)	-55 to +125
Operating RH (%)	≤ 95

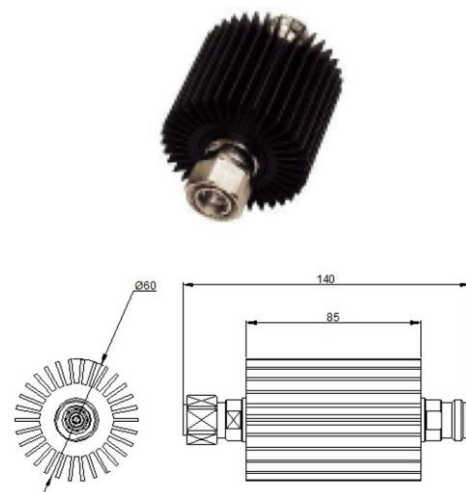

* including mounting bracket and connectors

** excluding mounting bracket and connectors