

## 7871xx54

### Low PIM Attenuator 100W 4.3-10 698-4000



#### Attenuator 698-4000 100W

Type	78710354	78710654	78711054	78711554	78712054	78713054
Attenuation (dB)	3	6	10	15	20	30
Attenuation Tolerance (dB)	±0.6	±1.0	±1.0	±1.0	±1.3	±1.3

Electrical Specifications	
Frequency (MHz)	698 - 4000
PIM3 (dBc, @2x43dBm)	≤ -160
Impedance (Ω)	50
Return Loss (dB)	≥ 19
Max Input Power (W)	100
Connector	4.3-10 F/M

Mechanical and Environmental Specifications	
Dimension (mm)**	176 x 176 x 97.5
Weight (kgs)*	4.3-10 F/M: 4.7
Ingress Protection	IP65
Operating Temperature (°C)	-40 to +65
Operating RH (%)	≤ 95

Packing Information	
Packing Size (mm)	415 x 290 x 265
SKU (unit/inner carton)	4 pieces per inner carton/ box

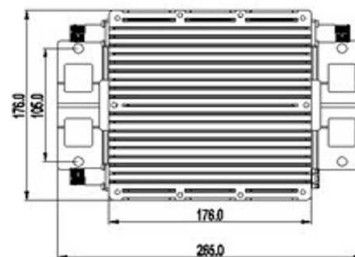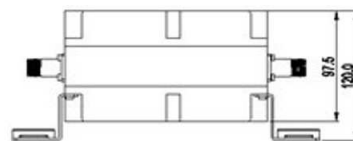

\* including mounting bracket and connectors  
 \*\* excluding mounting bracket and connectors