

## 7871xx55

### Attenuator 100W 4.3-10 DC-4000

### Attenuator DC-4000 100W


Type	78710355	78710655	78711055	78711555
Attenuation (dB)	3	6	10	15
Attenuation Tolerance (dB)	±0.7	±0.7	±0.7	±0.7

Type	78712055	78713055	78714055
Attenuation (dB)	20	30	40
Attenuation Tolerance (dB)	±0.7	±0.8	±0.8

Electrical Specifications	
Frequency (MHz)	DC - 4000
PIM3 (dBc, @2x43dBm)	≤ -105
Impedance (Ω)	50
Return Loss (dB)	≥ 21
Max Input Power (W)	100
Connector	4.3-10 F/M

Mechanical and Environmental Specifications	
Dimension (mm)**	Ø60 x 150
Weight (kgs)*	4.3-10 F/M: 0.95
Ingress Protection	IP55
Operating Temperature (°C)	-55 to +125
Operating RH (%)	≤ 95

Packing Information	
Packing Size (mm)	225 x 70 x 70
SKU (unit/inner carton)	50 pieces per inner carton/box

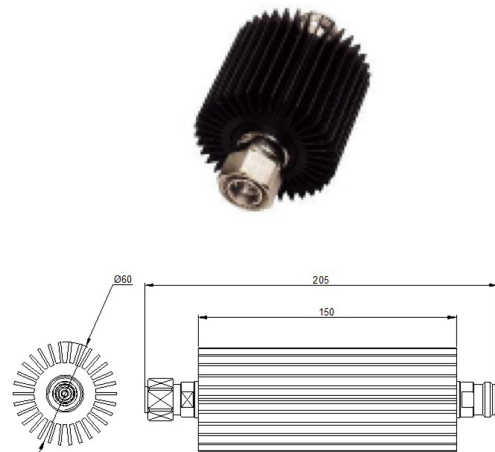

\* including mounting bracket and connectors  
 \*\* excluding mounting bracket and connectors