


78715160

Indoor Omni Antenna (Ultra-Thin Plate)
H-Pol 4-port 4/8dBi
698-960 / 1425-6000


Omni Indoor 698-960/1425-6000 4/8dBi (Ultra-Thin)

Type	78715160			
Frequency (MHz)	698-960	1425-2700	3300-4000	4000-6000
Gain (dBi)	4.0	5.5	6.0	7.5
VSWR	≤1.8	≤1.7	≤1.7	≤1.7
Polarization	Horizontal			
PIM3 (dBc, @2x43dBm)	≤-153			
Isolation (dB)	≥15	≥20	≥28	≥28
Horizontal Beamwidth (°)	360			
Vertical Beamwidth (°)	100-120	30-68	20-48	19-35
Input Impedance (ohm)	50			
Max. Input Power (W)	100			
Lightning Protection	DC Grounded			
Connector	4 x 4.3-10 Female			
Dimension (mm)	Ø355 x 14			
Weight (kgs)	Approx. 1.6			
Radome Material	ABS (UV Stabilized)			
Operating Temperature (°C)	-40 to +65			

H-Pattern

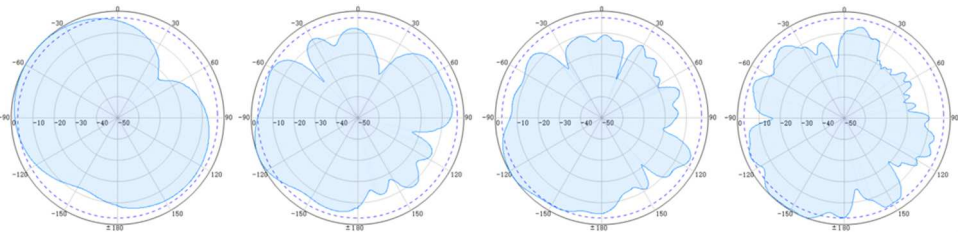

V-Pattern

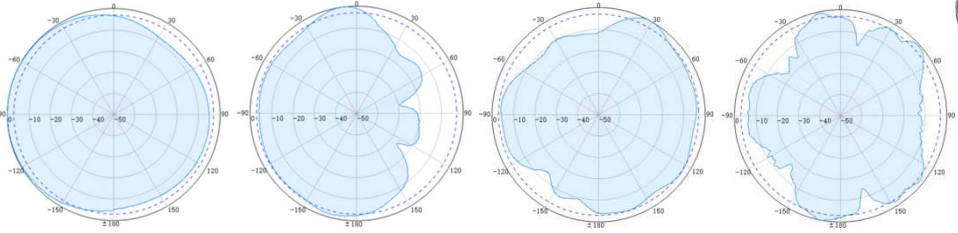

698MHz


2100MHz

3500MHz



5850MHz



Mechanical dimensions:

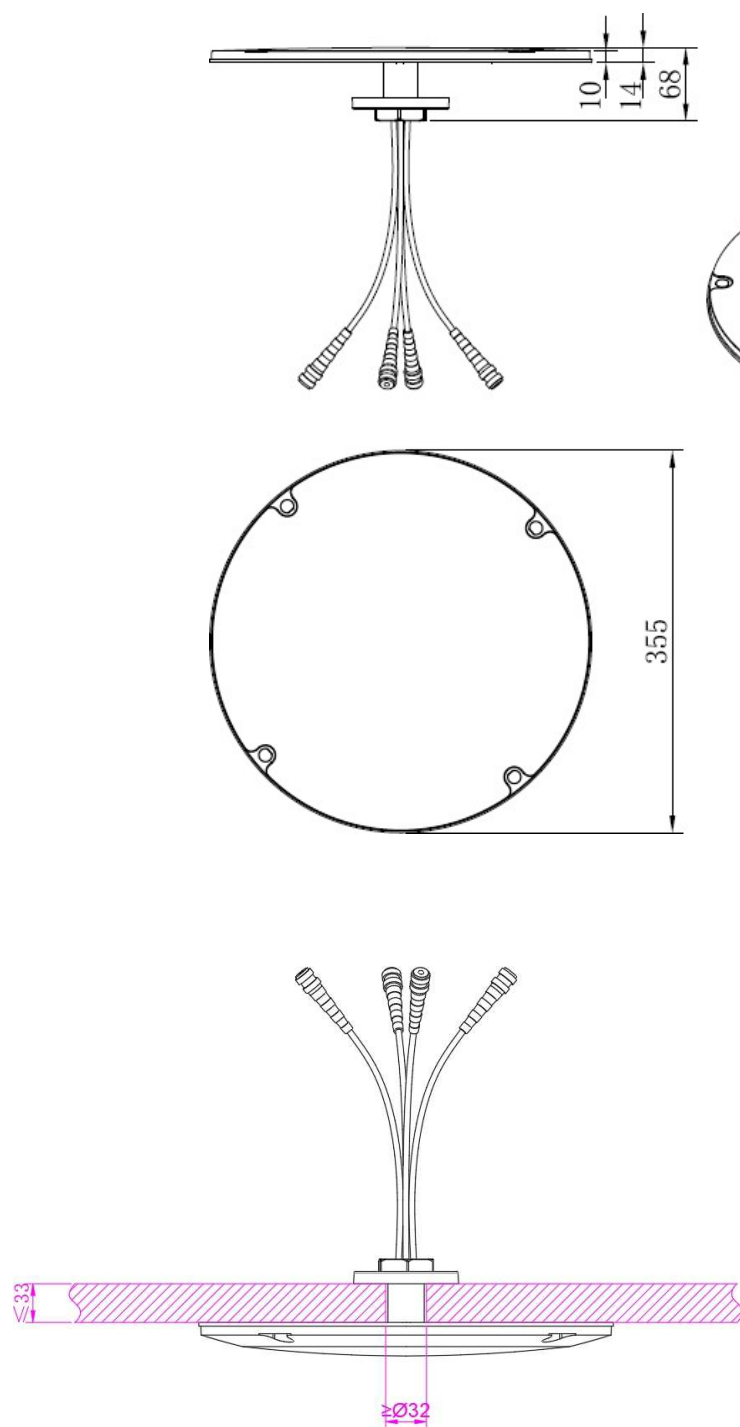

Installation Option 1
Mount on ceiling though locking Nut

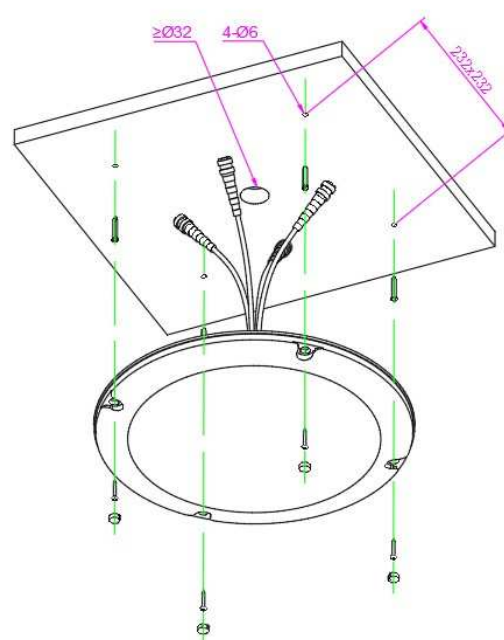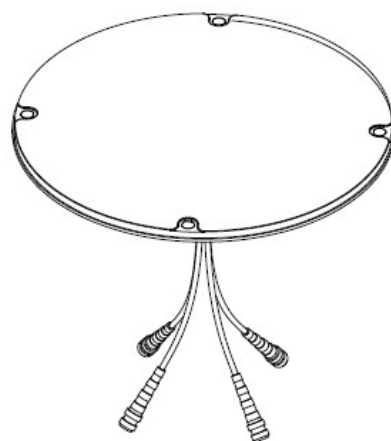

Installation Option 2
Mount on ceiling with screws