


78211380

Hybrid Combiner 2-in/2-out
 PIM -160dBc
 380-3800Mhz

2:2 Hybrid Combiner 380-3800Mhz

Type	78211380
Frequency (MHz)	380-3800
Insertion Loss (dB)	3 ± 1.0
VSWR	≤ 1.25
Isolation (dB)	≥ 23
PIM3 (dBc, @2x43dBm)	≤ -160
Input Impedance (ohm)	50
Max. Input Power (W)	500
Peak Power (W)	1,500
Connector	4.3-10 Female
Weight (kgs)*	1.1 ± 0.55
AISG/DC Bypass Path (2500mA Max)	IN1 OUT1 IN2 OUT2
Dimension (mm)**	188.8 x 48 x 46
Ingress Protection Class	IP65 (for outdoor and indoor)
Operating RH (%)	≤ 95
Operating Temperature (°C)	-40 to +65
Mounting	Wall Mount
Colour	Light Grey

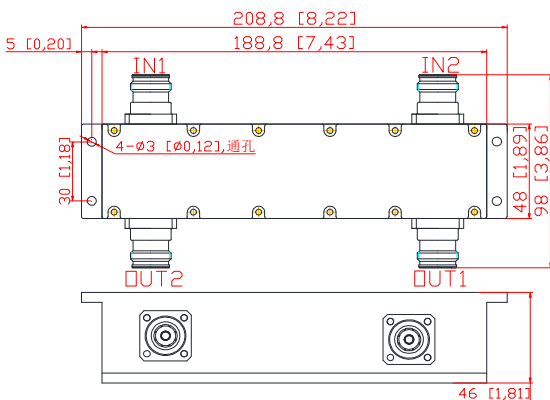

* including mounting bracket and connectors
 ** excluding mounting bracket and connectors

