

## 7871013x

340-3800Mhz Outdoor Power Splitter 2-  
/3-/4- Way Power Splitter  
Low PIM -160dBc  
500W DIN 7/16


### Power Splitter 500W 340-3800 (Square Tube)

Type	78710131	78710133	78710134
Frequency (MHz)	340-3800		
Splitting Output	2-way	3-way	4-way
Distribution Loss (dB)	3.0	4.8	6.0
Insertion Loss (dB)	< 0.3	< 0.4	< 0.5
Return Loss (dB)	≥ 19		
PIM3 (dBc, @2x43dBm)	≤ -160		
Input Impedance (ohm)	50		
Max. Input Power (W)	500		
Connector	DIN 7/16 Female		
Weight (kgs)*	0.6	0.7	0.8
Dimension (mm)**	318 x 25 x 25	365 x 25 x 25	399 x 25 x 25
Ingress Protection Class	IP65 (for outdoor and indoor)		
Operating RH (%)	≤ 95		
Operating Temperature (°C)	-25 to +65		
Environmental data	Electromagnetic Compatibility 2014/30/EU RoHS compliance directive 2011/65/EU ETSI EN 300 019-1-4		
Mounting	Built-in Bracket for wall mount		
Colour	Light Grey		




Drawing dimensions:

2 way Splitter 78710131

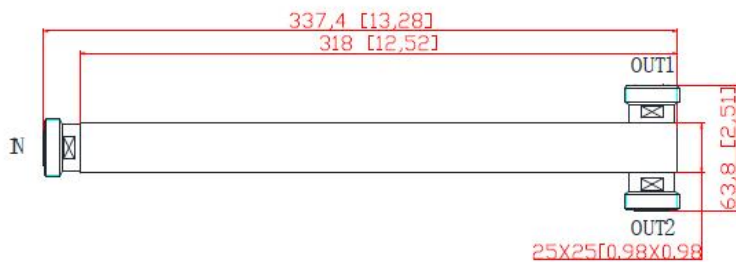

3 way Splitter 78710133:

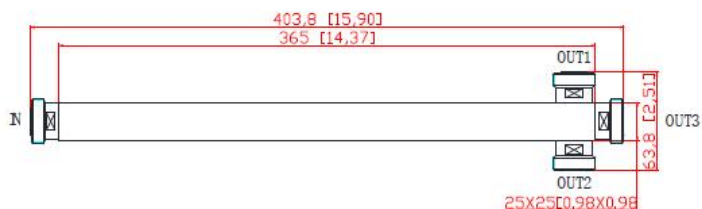

4 way Splitter 78710134:

