

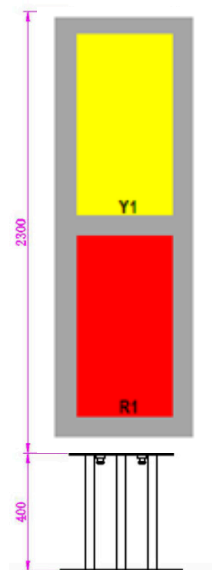


800112014


X-Pol Quasi-Omni 698-960 / 1710-2690 8/12dBi

Quasi-Omni Antenna
XX-Pol 4-port 8/12dBi
698-960 / 1710-2690

| Type | 80112014 | |
|----------------------------|---|-------------------|
| Frequency Range (MHz) | 698-960 | 1710-2690 |
| Gain (dBi) | 8 | 12 |
| VSWR | ≤ 1.7 | |
| 3rd Order PIM (dBc) | ≤ -150 @ 2x43dBm | |
| Polarization | ±45° | |
| Isolation (dB) | ≥ 18 | ≥ 18 |
| Horizontal Beamwidth (°) | 360 | |
| Vertical Beamwidth (°) | 12 | 7 |
| Input Impedance (ohm) | 50 | |
| Max. Input Power (W) | 250 | |
| Lightning Protection | DC Grounded | |
| Connector Type | 2 x 4.3-10 Female | 2 x 4.3-10 Female |
| Dimension (mm) | Ø315 x 2,300 | |
| Weight (kgs) | 15 | |
| Radome Material | Fiber Glass | |
| Reflector Material | Aluminum | |
| Operating Temperature (°C) | -40 to +65 | |
| Max. Wind Velocity (km/h) | 200 | |
| Mounting | Floor Mount with Steel Stand (Supplied) | |

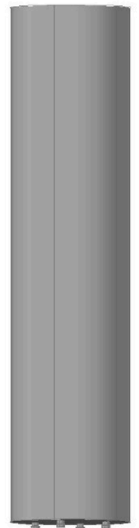

Bottom View - Antenna

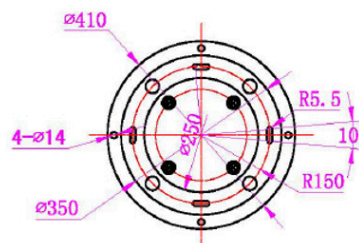

Bottom View - Stand