


**Omni flat antenna  
380-4000 2/5dBi**

**78712038**


indoor  
Omnidirectional Antenna  
HPol 1-port 2/5dBi  
380-4000

Type	78712038			
Frequency (MHz)	380-520	698-960	1710-2700	3300-4000
Gain (dBi)	2.0 ±1	2.0 ±1	4.0 ±1	4.5 ±1
VSWR	≤ 2.0	≤ 2.0	≤ 1.8	≤ 1.8
Polarization	Horizontal			
PIM3 (dBc, @2x43dBm)	≤ -153			
Horizontal Beamwidth (°)	360			
Vertical Beamwidth (°)	120	85	76	58
Input Impedance (ohm)	50			
Max. Input Power (W)	50			
Connector	1 x 4.3-10 Female			
Lightning protection	Outer conductor of the connectors is DC grounded Inner conductor of the connectors is not DC grounded			
Dimension (mm)	Ø280 x 19			
Weight (kgs)	Approx. 0.5			
Radome Material	ABS (UV Stabilized)			
Operating Temperature (°C)	-40 to +65			

H-Patterns

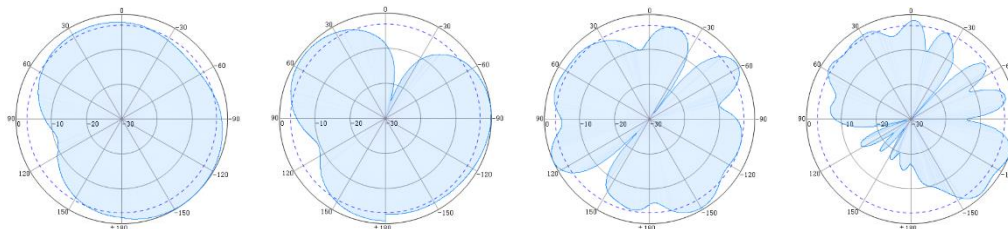

V-Patterns

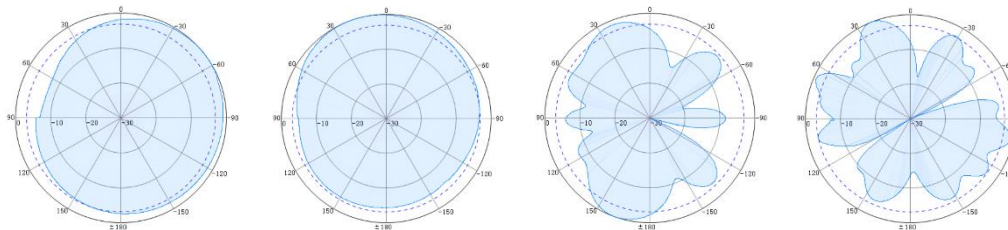

400MHz

760MHz

2170MHz

3500MHz

